




## OxBox Midi Series 8B10DA-CMI Monitoring and Isolating Digital Video Distribution Amplifier

### Key Features

- Ground Isolated Input
- Serial Digital 4:2:2 Input
- 4x 4:2:2 outputs
- Supports 525 / 625- line formats
- Bit-rates up to 360 Mbps
- Automatic cable equalization up to 250 m
- Composite outputs
- Compact size 110 x 80 x 25 mm

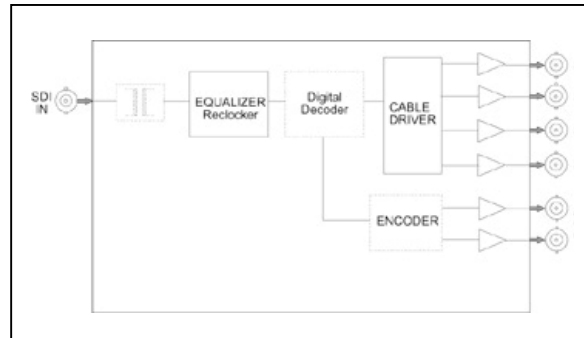

The OxBox Midi Series 8B10DA-CMI Monitoring and Isolating Digital Video distribution amplifier.

### Specifications

#### Input

Video	143/270 Mbps SMPTE 259M
Return loss	> 15 dB up to 270 MHz
Cable Length	Up to 250m

#### Outputs

Video	143/270 Mbps SMPTE 259M
Return Loss	To SMPTE 259
Jitter	< 0,2 UI p-p
Analog	Composite Video, 1vss, 75 ohm
Isolation	Max 400 VAC to ground

### Ordering Information

OxBox Midi Series 8B10DA-CMI Monitoring and Isolating Digital Video Distribution Amplifier.

**For first class sales and support contact Oxygen DCT at the following address or via the online website shop.**

2 Bacchus House  
Calleva Park  
Aldermaston  
RG7 8EN  
United Kingdom

W: [www.oxygendct.com](http://www.oxygendct.com)  
E: [info@oxygendct.com](mailto:info@oxygendct.com)  
T: +44 (0) 8707 4 62062  
F: +44 (0) 8707 4 62063

*All information contained herein is copyright of Oxygen Digital Communication Technology Ltd and is subject to continuous development. We reserve the right to change technical specifications without prior notice. E&OE.*